


REFRIGERATED RE-CIRCULATING FLUID CHILLERS

OTC Series – Air Cooled Remote Condenser to OTC-10A

A Partial List of Process Cooling Markets: Aero. & Defense, Digital Printing, Food & Beverage, Mobile Imaging, Plastics Photonics, Research & Semi-Conductor.

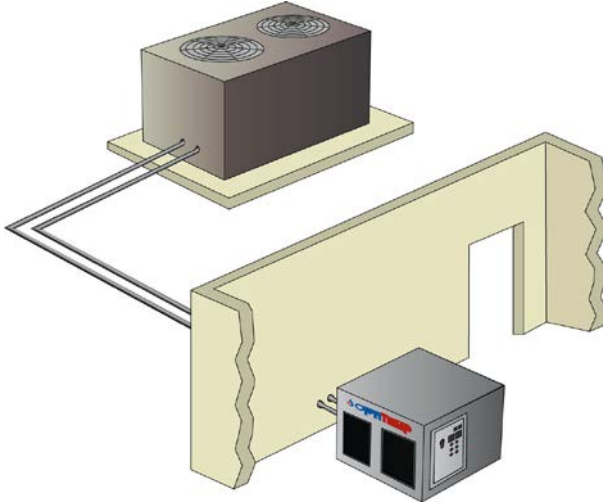

Models OTC-1.0A 1.0 to 10 Ton

Options:

Controls / Interlocks

- PLC controller
- RS232 and RS485 communication
- Ethernet ready controller
- Remote start/stop
- Audible alarm with silence
- Visual alarm beacon
- Remote control
- Fluid monitoring and control devices

Electrical

- 24V control systems
- Phase monitor
- Power cord extension
- CE compliance
- NRTL certifications

Mechanical

- Specialty wetted construction materials
- Multiple pump upgrades
- Anti-drain back prevention
- Particle filters
- UV filters
- Immersion heaters
- Remote temp sensing
- Fluid circuit insulation
- Manifolds
- Drain kits
- Extended warranty

Other

- Fluid conductivity control systems
- Automatic fluid pH control systems
- OPTISHIELD® corrosion inhibitors

Features:

- 1.0 to 10 Tons (3 to 35 kW) of cooling capacity with a remote condenser
- Opti Temp patented *advanced refrigeration control circuitry* (ARC) standard
- Micro-processor based PID auto tuning controller with digital display
- Programmable high temp or high/low temp alarm
- Temp output in °C or °F
- Dual frequency compatible
- Operating temperature ranges up to 90 C
- Non-ferrous wetted construction standard
- Rugged powder coated steel cabinetry
- Stainless steel MNPT process connections
- Swivel casters standard
- Removable cover and side access panels
- NEMA 1 electrical enclosure standard
- S.S. brazed plate evaporator
- Power cord provided
- One year limited warranty

Contact Information:

Opti Temp Inc.
1500 International Dr.
Traverse City, MI 49686
P: 231-946-2931
F: 231-946-0128
E: information@optitemp.com

Please contact our sales & applications department for a more complete list of available options.

REFRIGERATED RE-CIRCULATING FLUID CHILLERS

Specifications⁽¹⁾

Description		OTC-1.0A	OTC-1.5A	OTC-2.0A	OTC-3.0A	OTC-5.0A	OTC-7.5A	OTC-10A
Standard Flow Rating ⁽²⁾	GPM at PSI	4 65	4 65	5 to 7 55	5 to 7 55	12 53	18 to 30 56	18 to 30 56
	Max Available Flow Range	5	5	26	26	38	48	48
Pump (Standard)	HP Code	0.33 P3	0.33 P3	1 C2	1.5 C3	1.5 C3	2 C4	2 C4
Connection	MPT	0.5	0.5	1	1	1	1.25	1.5
Capacity ⁽³⁾	KW	3.0	5.8	7.3	10.6	17.6	25	35
	BTU/hr	9550	17000	20700	36100	54400	82000	120000
	tons	0.9	1.6	2.1	3.0	5.0	7.1	10
Compressor	HP	1	1.5	2	3.5	5	7.5	12
	Type	H	H	H	S	H	S	S
Full Load Amps ⁽⁴⁾	115/1/60	NA	NA	NA	NA	NA	NA	NA
	100/1/50	NA	NA	NA	NA	NA	NA	NA
	230/1/60	15	22	29	46	48	NA	NA
	230/1/50	14	20	26	42	44	NA	NA
	230/3/60	12	16	17	31	36	57	60
	460/3/60	6	8	10	15	14	23	35
Dimensions ⁽⁵⁾	Height	27.5"	27.5"	26.5"	26.5"	55"	55"	55"
	Width	28"	28"	36"	36"	38"	38"	38"
	Depth	25"	25"	36"	36"	62"	62"	62"
Weight	lbs.	205	215	350	455	815	855	900
Internal Reservoir	Gallon	2.5	2.5	2.5	2.5	2.5	9	9
Temp Stability ⁽⁶⁾	°F	± 0.2	± 0.2	± 0.2	± 0.2	± 0.5	± 0.5	± 0.5
Refrigerant	Type	R134A	R134A	R134A	R134A	R407C	R407C	R407C
Remote Condenser								
Dimensions	Height	22	22	22	22	40.5	40.5	40.5
	Width	37.5	37.5	37.5	37.5	43	43	43
	Depth	22	22	22	22	40	50	70
Fan(s)	Quantity	1	1	1	1	1	1	2
	HP	¼	¼	¼	¼	1/3	½	1/3
	CFM	2400	2400	2400	2400	5050	6450	6450
Full Load Amps	115/1/60	NA	NA	NA	NA	NA	NA	NA
	100/1/50	NA	NA	NA	NA	NA	NA	NA
	230/1/60	2	2	2	2	3.4	3.9	6.8
	230/1/50	NA	NA	NA	NA	NA	NA	NA
	230/3/60	NA	NA	NA	NA	2.6	2.6	5.2
	460/3/60	NA	NA	NA	NA	1.3	1.3	2.6
Weight	lbs.	96	96	96	96	180	260	450

(1) As a result of continuous improvement efforts, specifications are subject to change without notice or liability. (2) Pump pressures at pump discharge. (3) Capacity based on 55 °F LWT and 95 °F ambient air temperature. Capacities may be ± 5% as reserved by compressor manufacturer. (4) Full load amps for models with standard pumps. Consult applications engineering for models with optional pumps. Full load amps must be used for sizing disconnects and supply wiring. Contact factory for 50 Hz applications engineering. (5) Dimensions are approximate and include castors but do not include filters. (6) Cooling stability only. Optional heating stability: ± 2.0°F.